


LCDF 460 W ADVANCED

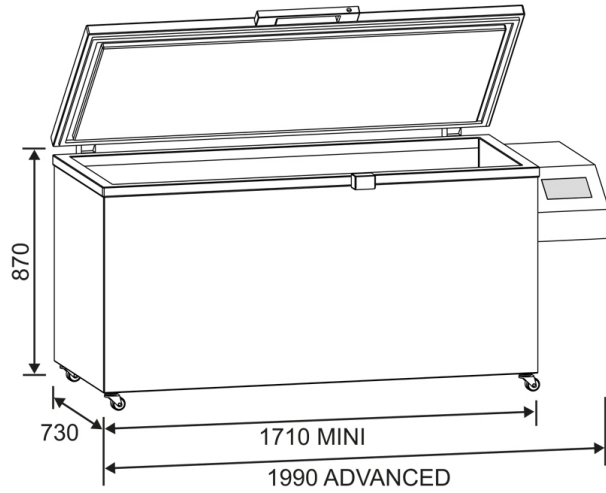

Color: **White**

Panel: **ADVANCED**

- Touch control panel with 7" display and password
- Data download to USB
- Backup battery for managing alarms in case of power failure
- Audible and visual alarms
- Wi-Fi connection (available starting from July 2024)

TECHNICAL FEATURES

Product Code	BBE601T
Temperature	-20°C / -45°C
Refrigeration Type	Static
Defrost Type	Manual
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	480
Net Capacity (liters)	460
External Dimensions (W x D x H mm)	1710 (MINI) / 1990 (ADV) x 730 x 870

ELECTRICAL DATA

Power Supply (V/ph/Hz)	220-230/1/50
------------------------	--------------

ELECTRICAL DATA

Energy Consumption (kWh/24h)	2,0
------------------------------	-----

STRUCTURAL FEATURES

Structure	Chest
Insulation Thickness (mm)	100
Counterbalanced Lid	Yes
Heated Door Seal	Yes
Maximum Shelf Quantity	-

CONTROL PANEL

Display Type	Touch 7"
Languages	ITA - ENG - FRA
Access Password	Yes
3-Level Access Password	Yes
Temperature Graph	Visible on display
Probe Type	Nr. 3 PT1000
Alarm Signaling	Acoustic and visual
Alarm Indications	Text form / codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Low Battery Alarm	Yes
Dirty Condenser Alarm	Yes
Evaporator Freezing Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Acoustic Alarm Reactivation	Yes

CONTROL PANEL

Alarm Functionality Test	Yes
Calibration	Yes
Alarm Memory	Yes
Door Openings Memory	Yes
Defrost Memory	Yes
Event Memory	Yes
Daily Min/Max Temperature Memory	Yes
Data Logger Function with USB Port	Yes
USB Port	Type B
Data and Event Storage	Yes (on internal memory)
Dry Contact	Yes
Wi-Fi Connectivity	No
Monitoring App	Yes
Backup Battery for Display and Alarms	Yes
Backup Battery Autonomy for Display and Alarms (hours)	48

ACCESSORIES

Basket
One-way rollers Ø 20 mm
Temperature chart recorder
GSM/GPRS telephone dialer (available for ADVANCED control panel only)
Voltage 230V/1ph/60Hz
Plug type G
Plug type I
Wooden crate packing
IQ Documentation
OQ Documentation